



* FOUNDATION DRAWING (ZENITH 150S) YT-39-105009


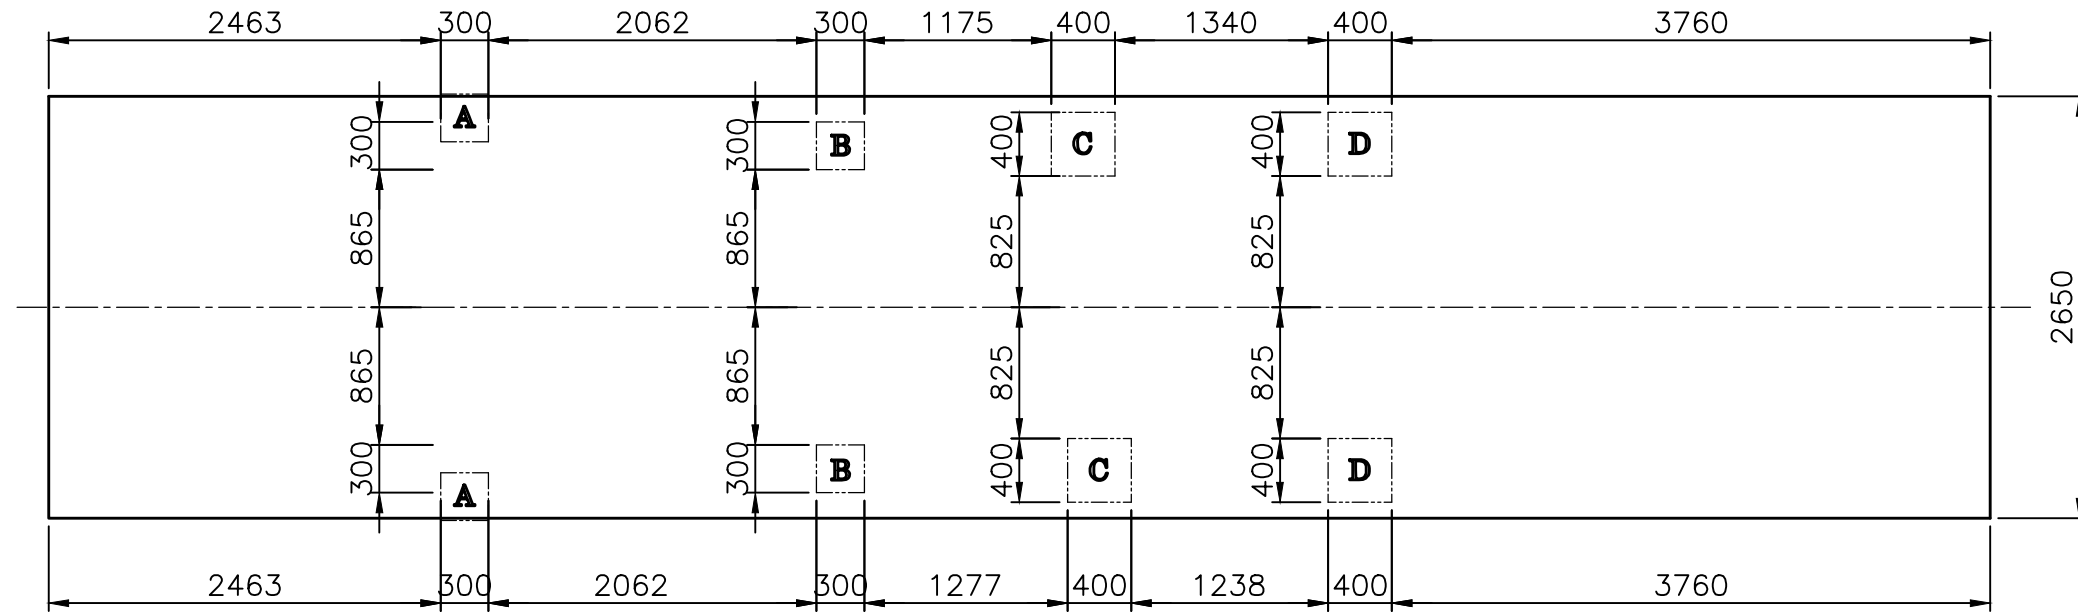


	Static	Dynamic
A	2 ton	3 ton
B	3 ton	4.5 ton
C	9 ton	13.5 ton
D	7 ton	10.5 ton

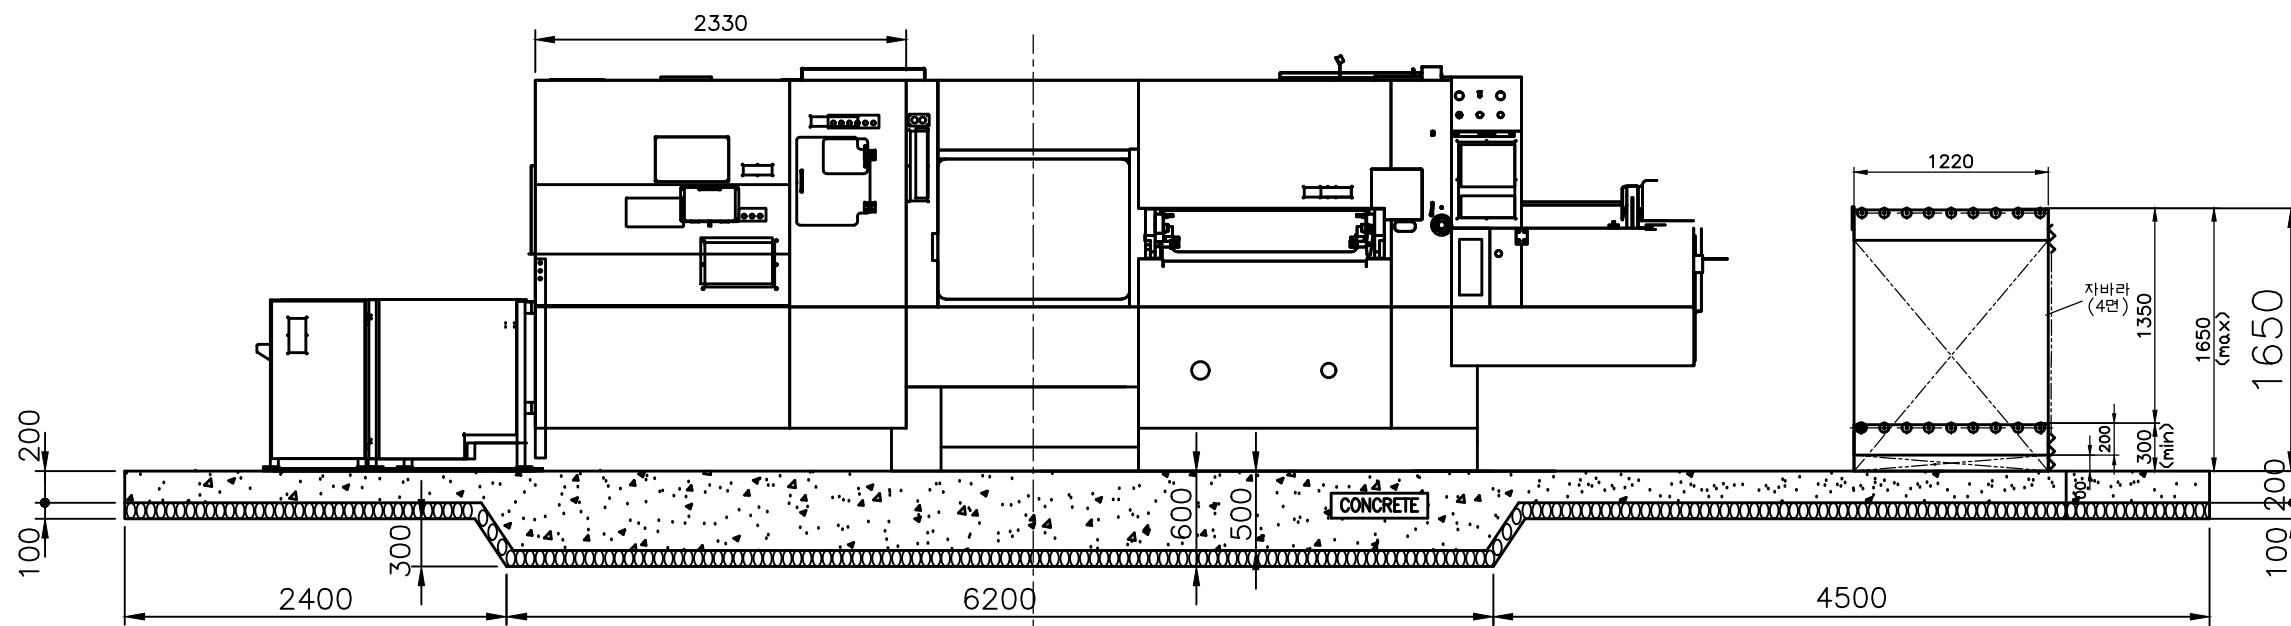

NOTES
 콘크리트 강도 (Kg/Cm²)

* LAYOUT(ZENITH150S) YT-39-105009

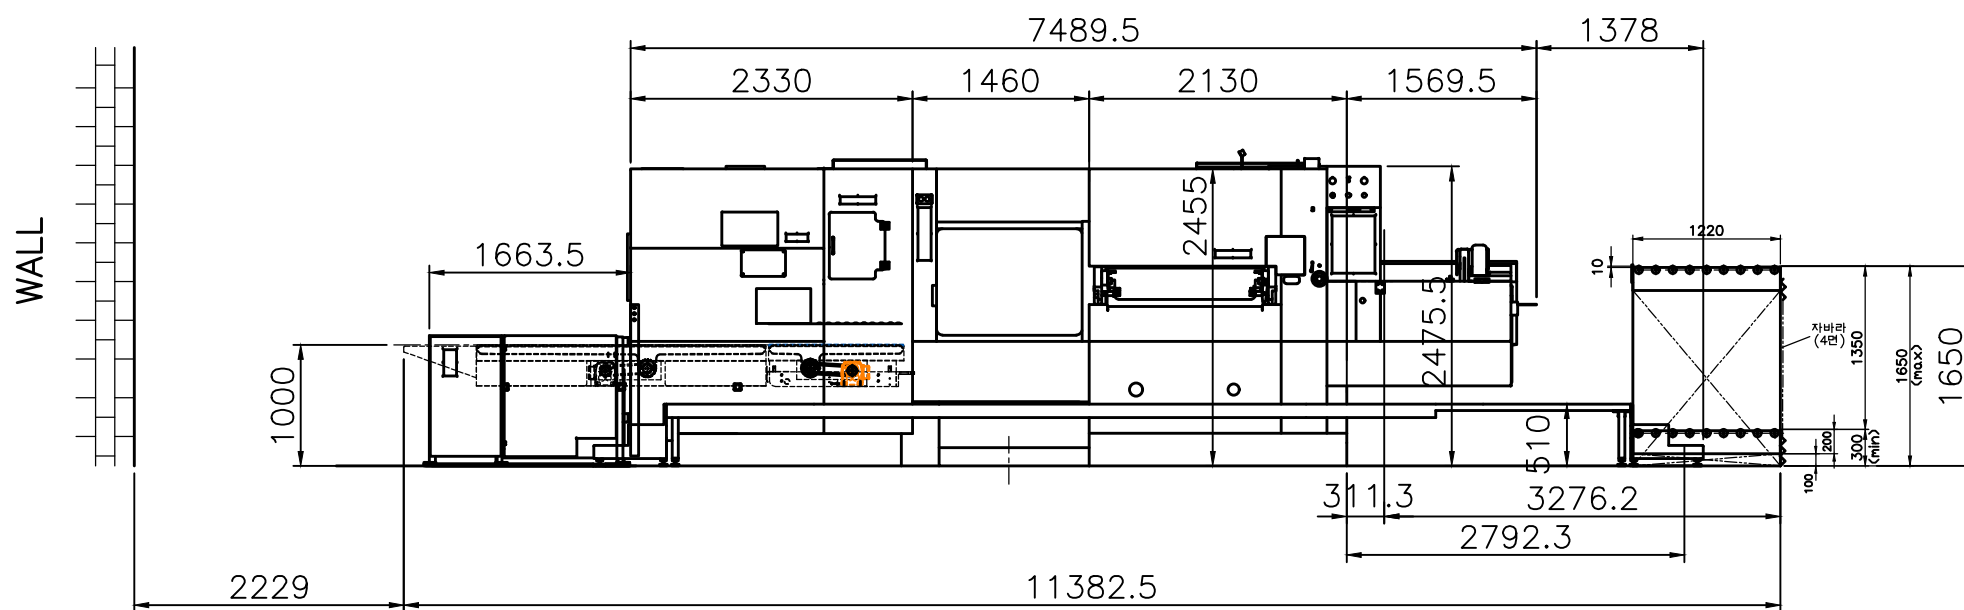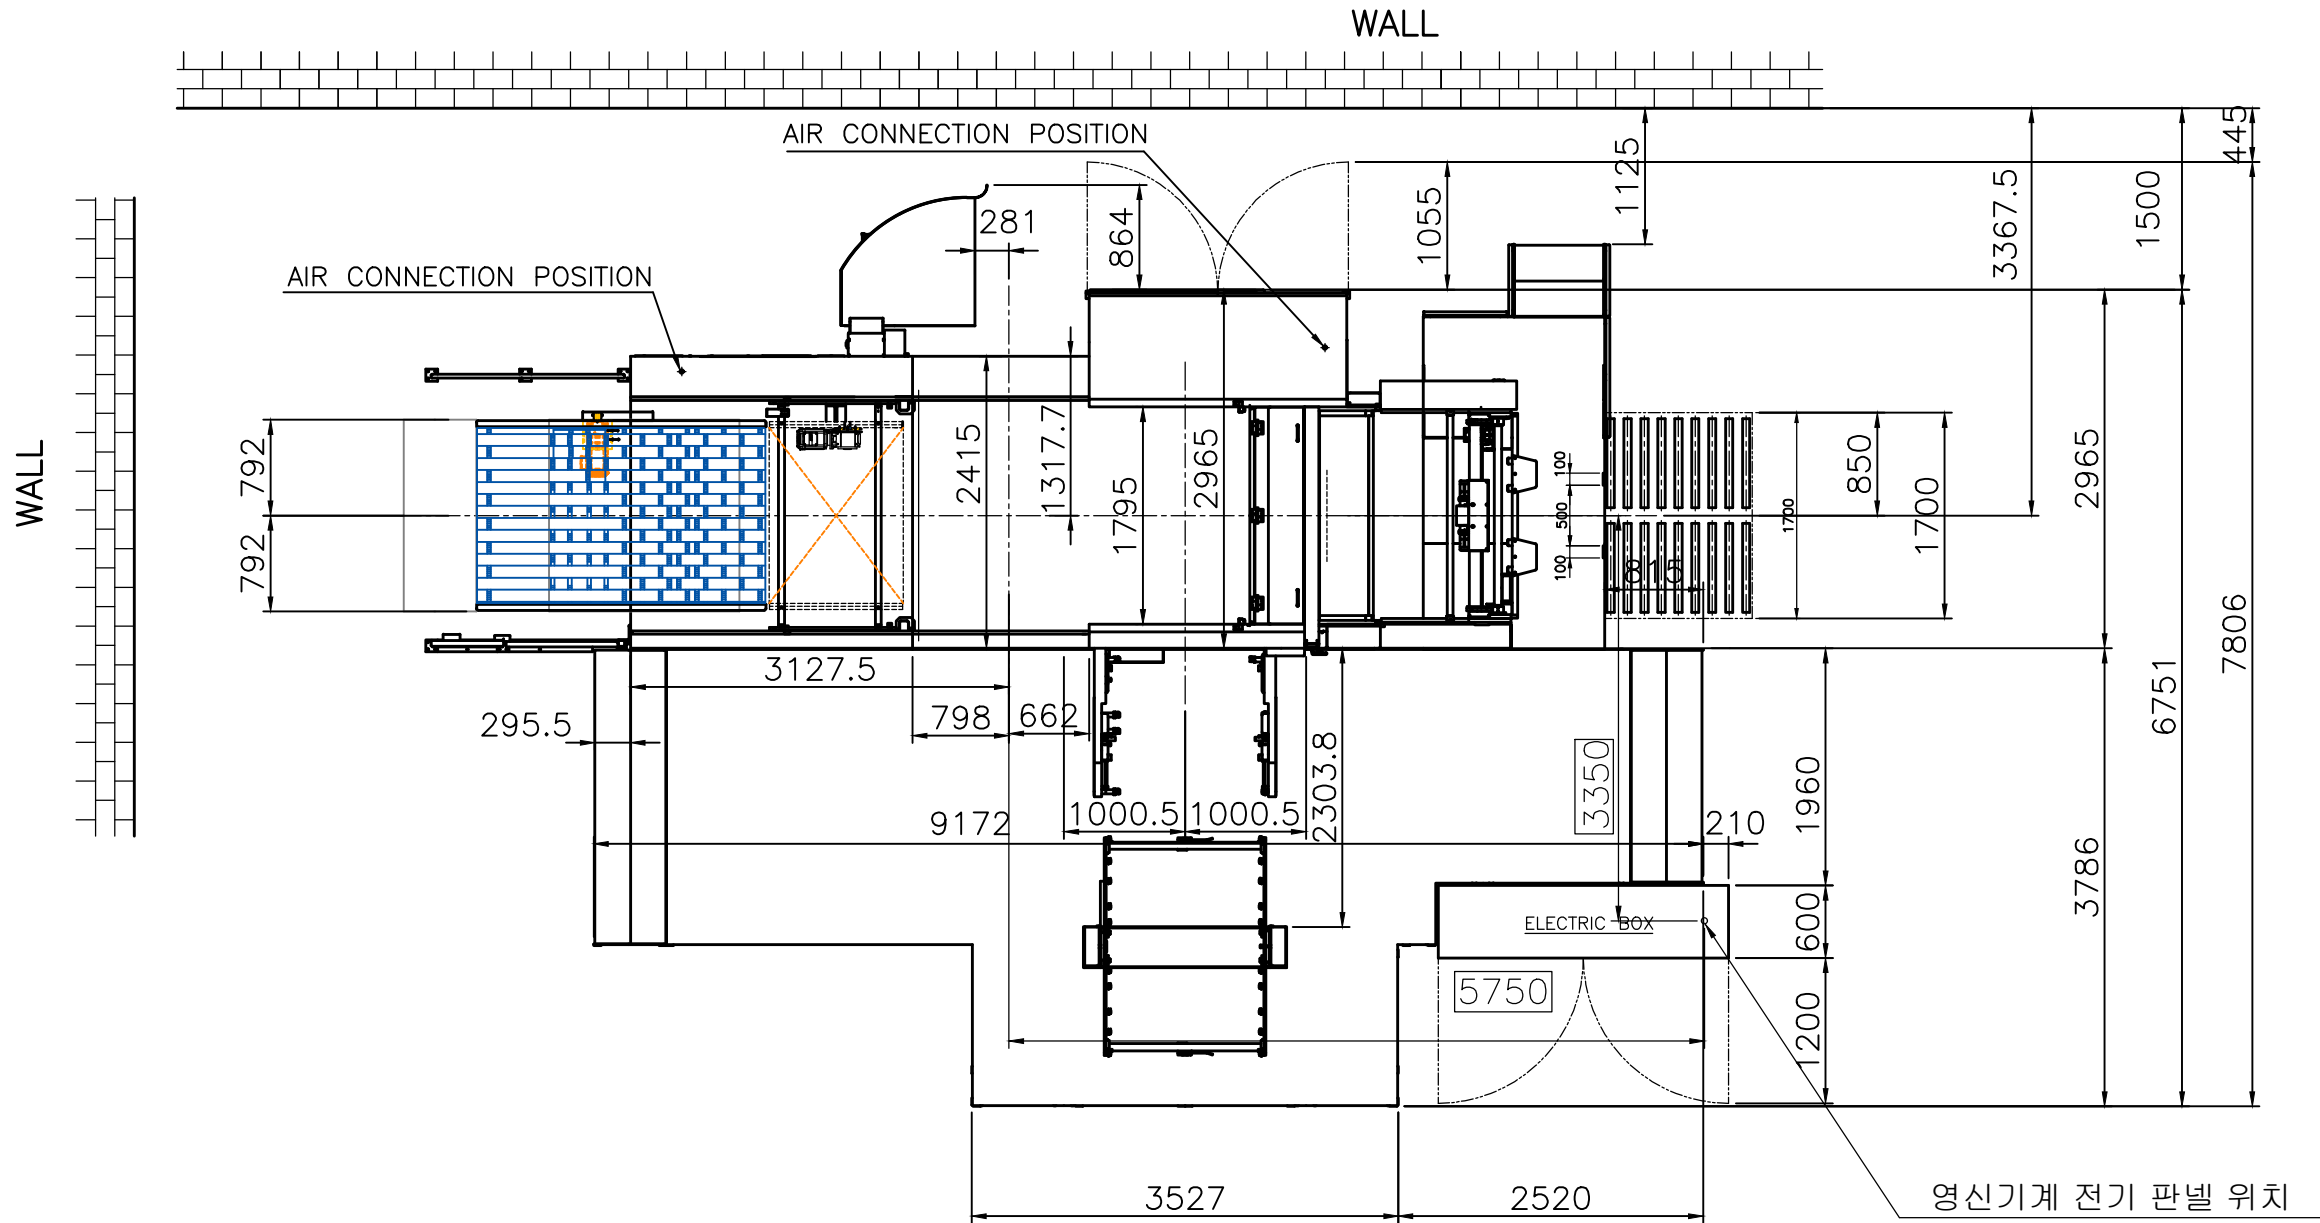

ELECTRIC SPECIFICATION

1. VOLTAGE : 380V 50Hz THREE-PHASE
2. POWER : 75kw
3. ELECTRIC WIRE : 4C x 38SQ

AIR SPECIFICATION

1. PTESSURE : 6 ~ 7kgf/cm
2. INTERNAL DIAMETER : $\phi 16$

AUTOFEEDER SPECIFICATION

1. VOLTAGE : 380V 60Hz THREE-PHASE
2. SUPPLY LEAD : 15KVA(40A)
3. PLANT DESIGN : WOOSUNG AUTOCON